
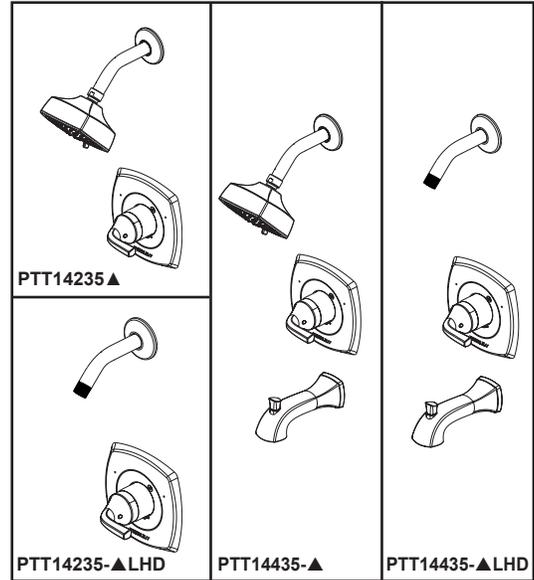


PEERLESS®

PTT14235-▲
PTT14435-▲
PTT14235-▲LHD
PTT14435-▲LHD

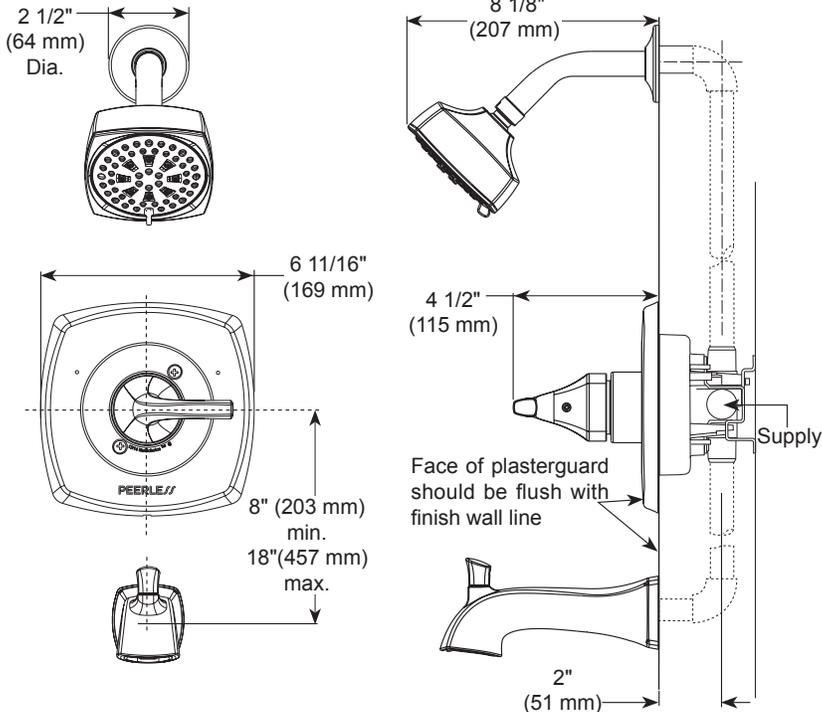

TUB AND SHOWER FAUCET TRIM

■ Parkwood® Collection

■ Shower Only

(PTT14235-▲ & PTT14235-▲LHD)

■ Tub/Shower



(PTT14435-▲ & PTT14435-▲LHD)

STANDARD SPECIFICATIONS:

- Shower head max flow rate 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body (R10000 Series); not included.
- Back-to-back installation capability.
- Red/blue markings on escutcheon for hot/cold identification.
- Temperature only controlled with handle rotating a maximum of 120° from full cold to the full hot.
- Cartridge utilizes integral check valve to prevent the cross flow of water within the valve.
- Easy-turn 6-spray setting shower head.
- Spray settings include: full body spray, massage spray, full spray with massage, shampoo rinse spray, shampoo rinse with full spray & pause.
- Slip-on tub spout.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.

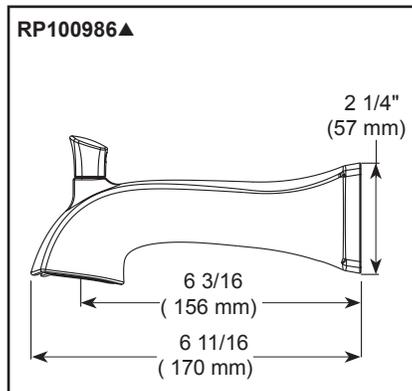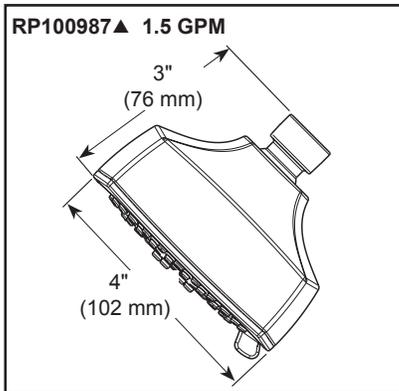

▲ Designate proper finish suffix

PSP-B-PTT14435 Rev. B



OFFICED BY
CSA Group
SHOWN HEADS
PRIMEROS RECONOCIDOS
CAMERAS DE INVESTIGACION

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to PTT14235-▲ & PTT14435-▲ only
- ICC/ANSI A117.1 – Valve control only