

# HOSES

# KOBRA®


FAST - FIERCE - FLEXIBLE



## KOBRA® HOSE OVERVIEW

- Kevlar lined for strength and flexibility
- All brass fittings open to maximum flow
- No blow-outs at high pressures
- UV protective bag to protect color fading
- Hose fittings field repairable with replacement parts and rebuild kits
- Provides an industry superior 5-1 safety factor
- Custom length and fitting combos available; contact customer service

## ANATOMY OF THE KOBRA® HOSE

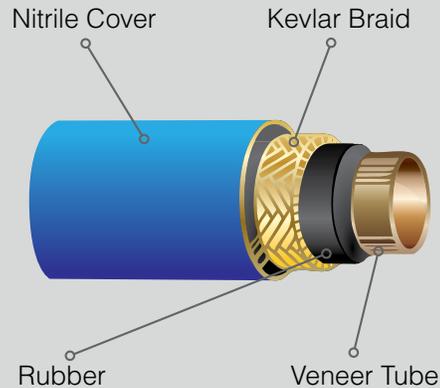

## GASKET SEAL HOSES (CLE)

**800 PSI WORKING – 4000 PSI BURST\*** 

KOBRA® CLE series feature a new 14 TPI pitch knurl to provide an improved grip for easier sealing and greater comfort with a blow-out resistant gasket. The patent pending design features a hood that locks the gasket into the fitting with a straight edge to straight edge force that eliminates the blow-out of the gasket. The barbed depressor locks into the gasket exerting more outward force pushing the gasket further into place. The depressor is precisely machined, has a dimple that guides the valve core into place, and is designed to provide maximum flow.

*\* 3/8" Gasket Sealed Hoses are 600 psi working – 3000 psi burst*



## SECURE SEAL HOSES (CLS)

**800 PSI WORKING – 4000 PSI BURST** 

The Secure Seal Hose is one of the only UL recognized hoses for use with R410A. Our CCLS series of KOBRA® hoses open to full flow and have a low loss fitting that traps the refrigerant inside the hose to help meet non-venting requirements. The internal thrust washer ensures free rotation. The secure seal fitting is rebuildable with a parts kit. The low loss fitting is offered on our Kevlar-lined KOBRA® high pressure hose.



# HOSES

# KOBRA®

FAST - FIERCE - FLEXIBLE



CCLE-60

## KOBRA® CLE SERIES HOSE



Gasket-sealed, high pressure charging hose.


800 – 4000 PSI

Blow-out resistant gasket locked into the hood fitting with a straight edge to straight edge force to eliminate blow-outs

Barbed depressor precisely machined to guide the valve core into place

Maximum flow – No blow-outs

Easy grip 14 TPI pitch knurl

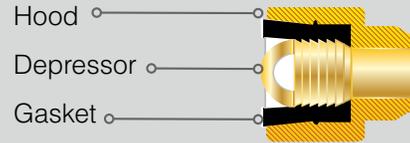

*JB's ultra-coarse 14 TPI pitch knurl provides an improved grip for easier sealing and greater comfort*

### CLE SERIES - KOBRA® GASKET-SEALED ENVIRO HOSE

LENGTH	BLUE	YELLOW	RED	BLUE, RED YELLOW, (3 PACK)	BLUE, RED YELLOW, PLUS BLACK 3/8" (4 PACK)
36" (91 cm)	CLE-36B	CLE-36Y	CLE-36R	CCLC-36	CCLC4-36
48" (122 cm)	CLE-48B	CLE-48Y	CLE-48R	CCLC-48	CCLC4-48
60" (152 cm)	CLE-60B	CLE-60Y	CLE-60R	CCLC-60	CCLC4-60
72" (182 cm)	CLE-72B	CLE-72Y	CLE-72R	CCLC-72	CCLC4-72
10' (3 m)	CLE-120B	CLE-120Y	CLE-120R	---	---
25' (7.6 m)	CLE-300B	CLE-300Y	CLE-300R	---	---
50' (15.2 m)	CLE-600B	CLE-600Y	CLE-600R	---	---
75' (22.8 m)	CLE-900B	CLE-900Y	CLE-900R	---	---
100' (30.5 m)	CLE-1200B	CLE-1200Y	CLE-1200R	---	---

### KOBRA® ENVIRO HOSE REPAIR AND REPLACEMENT PARTS

<b>P511</b>	1/4" CLE, CLV and CLB Series replacement gasket
<b>P90514</b>	CLE, CLV and CLB Series replacement depressor
<b>P90016</b>	3/8" KOBRA® black and yellow charging hose replacement o-ring for CL6HD, CCLV, CL6 and CLV6 series hoses
<b>P90008</b>	1/2" Heavy-duty black charging hose replacement o-ring

## KOBRA® CLBV SERIES HOSE




Gasket-sealed charging hose with quarter turn lever ball valve fittings.

800 – 4000 PSI

Meet non-venting requirements by trapping refrigerant with ball valve fittings

### CLBV SERIES - KOBRA® HOSE WITH BALL VALVE

LENGTH	BLUE	YELLOW	RED	BLUE, RED YELLOW, (3 PACK)	BLUE, RED YELLOW, PLUS BLACK 3/8" (4 PACK)
36" (91 cm)	CLBV-36B	CLBV-36Y	CLBV-36R	CCLBV-36	CCLBV4-36
48" (122 cm)	CLBV-48B	CLBV-48Y	CLBV-48R	CCLBV-48	CCLBV4-48
60" (152 cm)	CLBV-60B	CLBV-60Y	CLBV-60R	CCLBV-60	CCLBV4-60
72" (182 cm)	CLBV-72B	CLBV-72Y	CLBV-72R	CCLBV-72	CCLBV4-72
72" (182 cm)	CLBV-72B	CLBV-72Y	CLBV-72R	CCLBV-72	CCLBV4-72

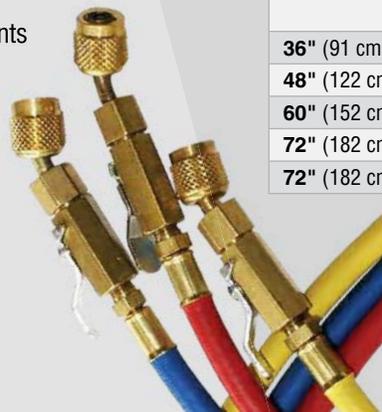

CCLBV-60