
PEERLESS

Mounting without escutcheon plate

Min.2 1/2" (64 mm) Clearance to Back Splash Recommended 7 1/16" (180mm) 120° Swing Spout 8 1/16" (205mm) 5 3/8" (137mm) 1 13/16" (46mm) 1 1/2" 7 1/16" 2 X 1 5/16"~1 1/2" (38 mm) (180mm) (33~38mm) Max. Deck Hole Size 9 1/16" Thickness (230mm) -1/2"-14 NPSM


Mounting with escutcheon plate

Min.2 1/2" (64 mm) Clearance to Back

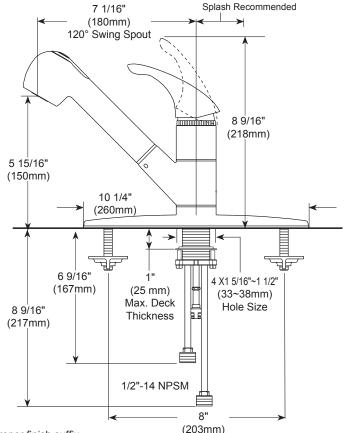

▲ Designate proper finish suffix

P18550LF-▲



KITCHEN FAUCETS

- Single handle pull-out
- 1 or 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Max. flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- One or three hole mount (escutcheon optional, included)
- \bullet Standard 7 1/16" (180mm) long spout swings 120°
- Replaceable rotating ball valve with replacerble nonmetallic seats
- 1/2"- 14 NPSM threaded male inlet adapters

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

• ASME A112.18.1 / CSA B125.1

LCC/ANSI A117.1 - Valve control only