
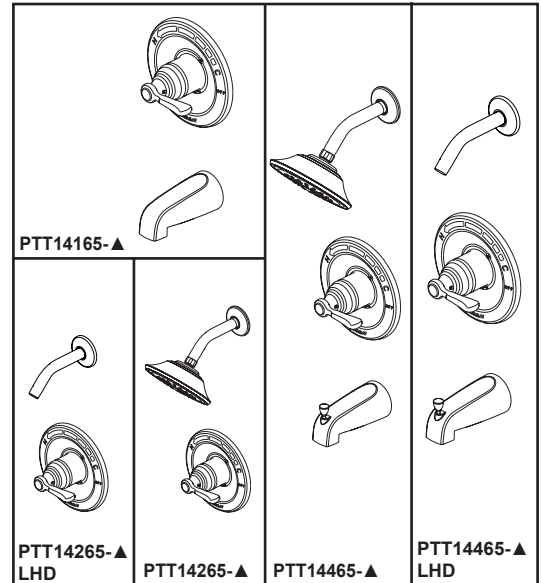


PEERLESS®

PTT14165-▲
PTT14265-▲
PTT14265-▲LHD
PTT14465-▲
PTT14465-▲LHD

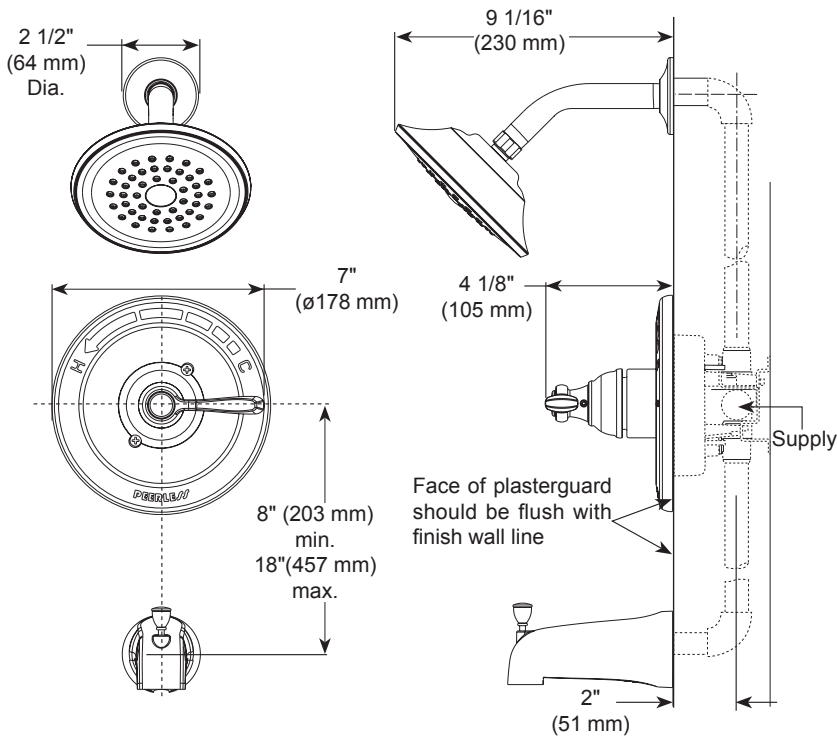

TUB AND SHOWER FAUCET TRIM

- Elmhurst® Collection
- Tub Only (PTT14165-▲)
- Shower Only (PTT14265-▲ & PTT14265-▲LHD)
- Tub/Shower (PTT14465-▲ & PTT14465-▲LHD)

STANDARD SPECIFICATIONS:

- Shower head maximum flow rate 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body (R10000 Series); not included.
- Back-to-back installation capability.
- Temperature only controlled with handle rotating a maximum of 120° from full cold to the full hot.
- Cartridge utilise integral check valve to prevent the cross flow of water within the valve.
- Single setting shower head.
- Slip-on tub spout.

WARRANTY


- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to PTT14265-▲ & PTT14465-▲ only
- ICC/ANSI A117.1 – Valve control only


RP101638▲-1.5
1.5 GPM

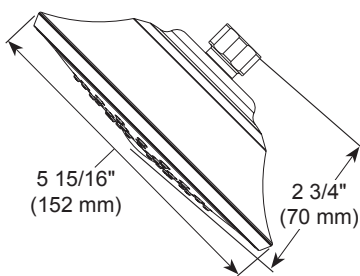

RP71609▲

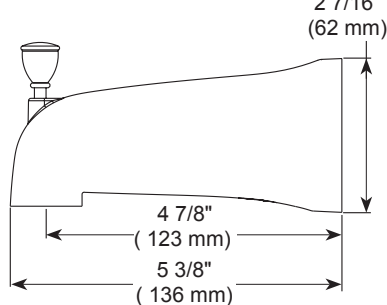

RP102063▲

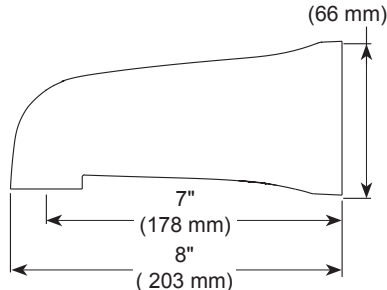

▲ Designate proper finish suffix

PSP-B-PTT14265 Rev. C