



# Sludge Sucker® Maintenance Kit

# Sludge Sucker®

**FOR U.S. JOBS**  
UNIWELD EMPLOYS OVER 300 WORKERS

A versatile, all-in-one kit that includes a Nitrogen regulator with a delivery pressure up to 400 PSI for pressure testing an A/C&R system for leaks. It also includes many accessories for cleaning condensate drain lines and for blowing off coils. It even has an air chuck to fill up that flat tire. As a bonus, our Sludge Blaster® is included (see page 80 for more information). Carry stands are sold separately (see page 41).



Blow off coils with Sludge Sucker® Blowgun




Clean condensate drain lines with the Sludge Blaster®



Inflate tire with the Sludge Sucker® Air Chuck

7 Nitrogen & CO<sub>2</sub>

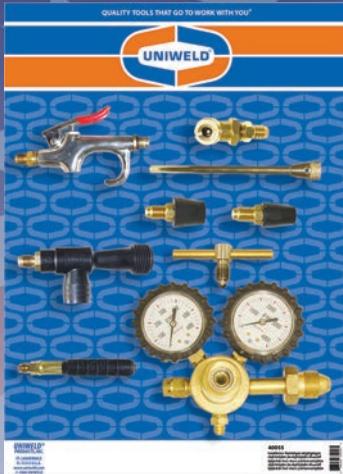

40055


## 40055 Sludge Sucker® Maintenance Kit

Part#	Description	Part#	Description
RHP400	Nitrogen Regulator	40048	Needle Tip
40000	Sludge Sucker®	40050	1/2" Rubber Plug
40061	Sludge Blaster®	40022	3/4" Rubber Plug
H2SSM	2 Ft. Hose	BG1	Blowgun
H5SMBY	5 Ft. Hose	40045	Air Chuck

## 40077 Sludge Blaster® Accessory Kit

Already own a Nitrogen regulator? Then this 8-piece accessory kit is for you. It attaches to your regulator and includes the most popular tools to unclog and flush drain lines.

Part#	Description	Part#	Description
40061	Sludge Blaster®	40050	1/2" Rubber Plug
H2SSM	2 Ft. Hose	40022	3/4" Rubber Plug
H5SMBY	5 Ft. Hose	BG1	Blowgun
40048	Needle Tip	40045	Air Chuck

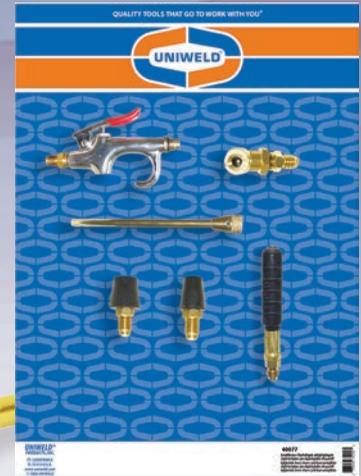

40077



Uniweild Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111  
info@uniweild.com • www.uniweild.com

75

## Regulators/Replacement Gauges



# Nitrogen/CO<sub>2</sub> Regulators

**FOR U.S. JOBS**  
UNIWELD EMPLOYS OVER 300 WORKERS


Regulators for use with Nitrogen or CO<sub>2</sub> (with optional F36 adaptor) that have been specially designed for purging and pressure testing. Large "T" handle with stainless steel pressure adjusting screw and bushing prevent galling.

7 Nitrogen & CO<sub>2</sub>



Reseatable Safety Blowoff  
Opens at 850-875 PSI

**RHP800**  
Nitrogen Regulator

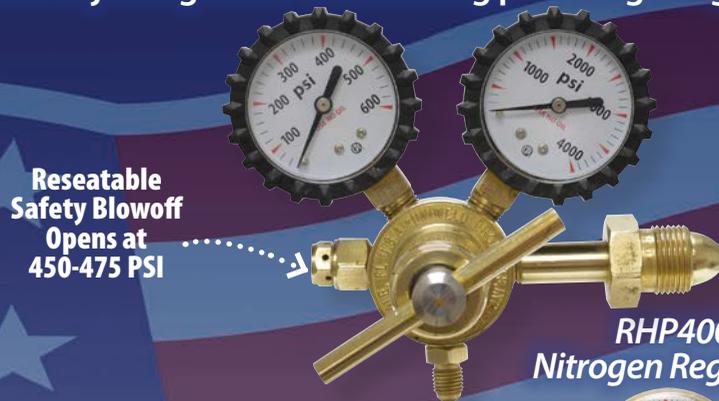

Reseatable Safety Blowoff  
Opens at 450-475 PSI

**RHP400**  
Nitrogen Regulator

F36 Adaptor  
CO<sub>2</sub> Cylinder  
(CGA320) to  
Nitrogen (CGA580)



Part#	UPC#	CGA Inlet	Outlet Connection	Gauges Delivery/Contents	Delivery PSIG
RHP400	13000	580	1/4" M.F.	[G8SD] 600/4000 [G7SD]	0-400
RHP500	13100	580	1/4" M.F.	[G8SD] 600/4000 [G7SD]	0-500
RHP800	13800	580	1/4" M.F.	[G34SD] 1000/4000 [G7SD]	0-800

Part#	Pressure	Diam.	Case	N.P.T.
G34SD	1000 psi	2"	Gold Steel Case	1/4"
G7SD	4000 psi	2"	Gold Steel Case	1/4"
G8SD	600 psi	2"	Gold Steel Case	1/4"

NOTE: REPLACEMENT GAUGES DO NOT INCLUDE 2" GAUGE BOOT [SOLD SEPARATELY]



**GB20S**  
2" Gauge Boot Set (2) Black

## Nitrogen and CO<sub>2</sub> Regulators

A compact, proven design for soft drink dispensing systems (not beer) and for many types of pressurizing applications. Features include: an adjustable pressure screw with locking nut and a self re-seating relief valve (not designed to protect downstream systems).

	CO <sub>2</sub> Part#	Nitrogen Part#	1 1/2" Gauges/Delivery	Delivery PSIG
Single Gauge Regulator	R1346	R1546	60 [G83D]	2-50
	R1349	R1549	300 [G84D]	2-175
	CO <sub>2</sub> Part#	Nitrogen Part#	Nitrogen/CO <sub>2</sub> Delivery/Contents	Delivery PSIG
Dual Gauge Regulator	R1358	R1558	[G20D] 15/4000 [G82D]	2-12
	*R1360	*R1560	[G83D] 60/4000 [G82D]	2-50
	*R1362	*R1562	[G78D] 200/4000 [G82D]	5-120
	*R1363	*R1563	[G84D] 300/4000 [G82D]	5-175



**R1563**

- CGA320-CO<sub>2</sub> inlet connection with O-ring
- CGA580-Nitrogen inlet connection
- 1/4" SAE flare outlet
- U.L. Listed

\*Gauges shipped with protective boots



Uniweld Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111  
info@uniweld.com • www.uniweld.com

**79**