

TUBE INSULATOR FOR CTS PIPING

558 SERIES

EZGlide™

SPECIFICATION

Sioux Chief 558 series Tube Insulator to be used where necessary to insulate CTS piping in residential or commercial applications. Fits 1 3/8" hole for wood studs or 1 11/32" hole for metal studs. Tube Insulators shall be IAPMO certified.

INSTALLATION

Insert into wood or metal studs and mount to surface using nail or screw in both of the clamp's provided holes.

MATERIALS

Low density polyethylene

WORKING TEMPERATURE

Maximum temperature: 180°F continuous
impact resistant to 0°F (-18°C)


DIMENSIONS

	558-2	558-3	558-4
A: Tube Size	1/2" CTS	3/4" CTS	1" CTS
B: Hole Diameter	0.187"	.187"	.187"
C: Depth	1"	1"	1"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



558-2

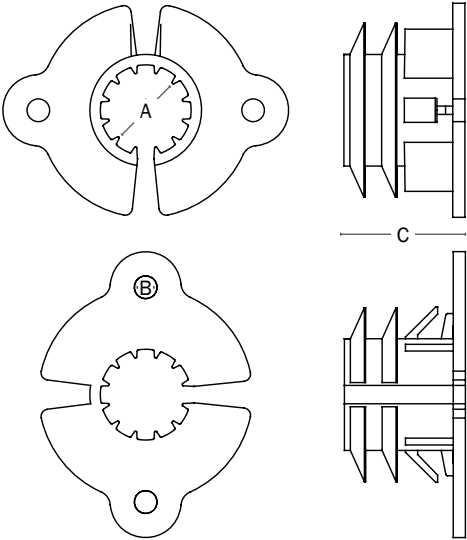

Made in USA

Create Item Number

558-A

e.g. **558-3:** Tube Insulator for 3/4" CTS piping

TUBE SIZE A

2 = 1/2" CTS

2PK2 = 1/2" CTS, 5/bag

3 = 3/4" CTS

3PK2 = 3/4" CTS, 5/bag

4 = 1" CTS