

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

MAU2 Male Gas Adapter - 15/16-16 Flare x Male Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied petroleum gases, and LP gas-air mixtures.


Operating Specifications:

Temperature: -40° - 150° F

Pressure: 1/2 PSI maximum

FITTING MATERIAL SPECIFICATIONS	
Brass Body	Brass
Steel Body	Steel, plated

PART DIMENSIONS (Inches)			
Model	DIA. A	DIM. B	DIM. C
MAU2-10-12	0.50	2.06	1-1/16
MAU2-10-8	0.50	2.00	15/16

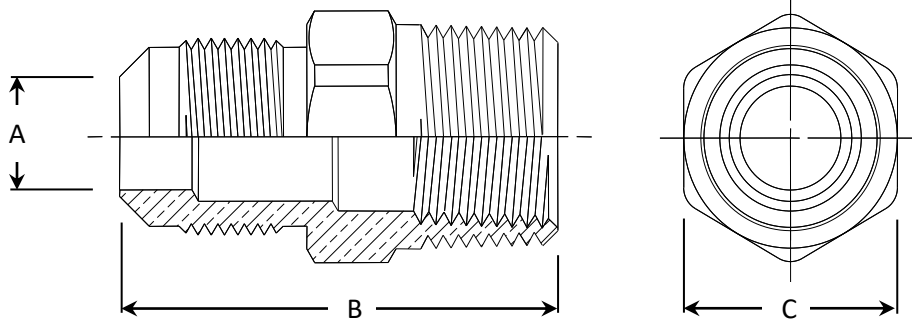

Part Listing:

<input type="checkbox"/>	MAU2-10-12	5/8" OD flare (15/16-16 thread) x 3/4" MIP (1/2" FIP tapped), brass
<input type="checkbox"/>	MAU2-10-12	5/8" OD flare (15/16-16 thread) x 3/4" MIP (1/2" FIP tapped), brass, bulk
<input type="checkbox"/>	MAU2-10-12 K5	5/8" OD flare (15/16-16 thread) x 3/4" MIP (1/2" FIP tapped), brass, 5 per bag
<input type="checkbox"/>	MAU2-10-12S	5/8" OD flare (15/16-16 thread) x 3/4" MIP (1/2" FIP tapped), steel
<input type="checkbox"/>	MAU2-10-8	5/8" OD flare (15/16-16 thread) x 1/2" MIP, brass
<input type="checkbox"/>	MAU2-10-8 B	5/8" OD flare (15/16-16 thread) x 1/2" MIP, brass, bulk
<input type="checkbox"/>	MAU2-10-8 K5	5/8" OD flare (15/16-16 thread) x 1/2" MIP, brass, 5 per bag
<input type="checkbox"/>	MAU2-10-8S	5/8" OD flare (15/16-16 thread) x 1/2" MIP, steel
<input type="checkbox"/>	MAU2-10-8S B	5/8" OD flare (15/16-16 thread) x 1/2" MIP, steel, bulk

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®

- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors