


| REV | DATE | NOTES |
|-----|----------|--|
| A | 10/17/06 | Initial Release: HW |
| B | 4/6/11 | CT8-40 Bundle Diameter update per UL Listing; JG |
| C | 11/15/13 | Specifications updated per ANSI/UL 62275 update |

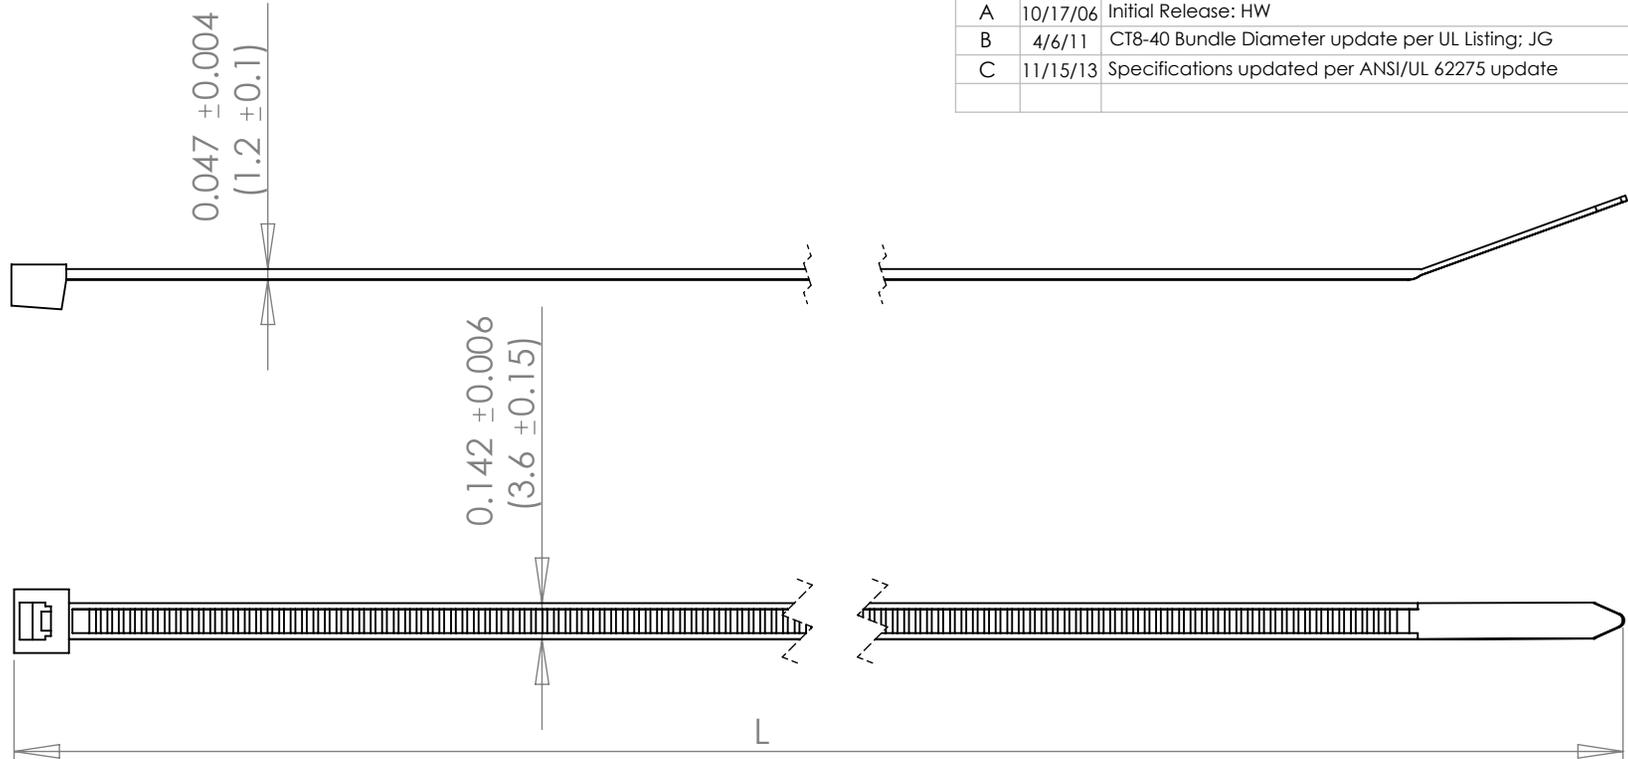

| Model Number | Approx Length "L" | Min Bundle Diameter | Max Bundle Diameter |
|--------------|-------------------|---------------------|---------------------|
| CT6-40 | 6" (150mm) | 0.276" (7mm) | 1.299" (33mm) |
| CT8-40 | 8" (200mm) | | 2.047" (52mm) |
| CT11-40 | 11" (280mm) | | 2.756" (70mm) |
| CT14-40 | 14.5" (370mm) | | 4.016" (102mm) |

*Suffix "-9" indicates Natural and "-0W" indicates UV Black
 *See Cambridge Catalog for Packaging Options and Designations

- Notes:
1. Minimum Loop Tensile Strength: 40lb (178N)
 2. Operating Temperature: -40°F to 185°F (-40°C to 85°C)
 3. Minimum Installation Temperature: 5°F (-15°C)
 4. UV Black ties are rated for outdoor use per ANSI/UL 62275
 5. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

| | | | | | |
|--|--|----------|--|--|-------------|
| NAME | | DATE | | CAMBRIDGE | |
| DRAWN J Li | | 10/17/06 | | | |
| UNLESS OTHERWISE SPECIFIED: | | | | 960 Alabama Ave., Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403 | |
| DIMENSIONS ARE IN INCHES [] DENOTES MILLIMETER | | | | TITLE: | |
| MATERIAL | | | | Cambridge Cable Ties | |
| FINISH | | | | 40lb Tensile Strength | |
| Nylon 6,6 | | 94V-2 | | SIZE | DWG. NO. |
| | | | | A | CT-40 REV C |
| DO NOT SCALE DRAWING | | | | REV | |
| | | | | C | |
| | | | | SHEET 1 OF 1 | |