

# PUSH GASKET CLOSET FLANGE

» 886 SERIES

PushTite™

## SPECIFICATION

Sioux Chief 886 series PushTite closet flange shall be used where necessary in drainage systems. Flange shall include holes for securing to floor and optional notches or slots for attachment of closet bolts. Inner diameter of flange outlet shall be at least 3" and have smooth inner walls with no obstructions or ledges. Engineered elastomer sealing gasket shall provide 3 points of contact to ensure a positive seal inside 4" nominal DWV pipe.

## MATERIALS

**Flange Body:** White or black ABS, cast iron

**Gasket:** chemical-resistant, engineered elastomer

## INSTALLATION

Lubricate gasket before installation if necessary. Push into 4" drain pipe. Always fasten flange to floor. Use screws in both holes on each side of slots or notches that will hold closet bolts


## DIMENSIONS

|                               |                                 |
|-------------------------------|---------------------------------|
| <b>A:</b> Gasket seal         | inside 4" DWV pipe              |
| <b>B:</b> Overall Height      | 3 <sup>7</sup> / <sub>8</sub> " |
| <b>C:</b> Flange diameter     | 7"                              |
| <b>D:</b> Flange opening dia. | 4 <sup>1</sup> / <sub>4</sub> " |
| <b>E:</b> Tailpiece height    | 3 <sup>1</sup> / <sub>2</sub> " |
| <b>F:</b> Gasket height       | 1 <sup>1</sup> / <sub>4</sub> " |

|                  |                 |
|------------------|-----------------|
| ITEM # SUBMITTED | _____           |
| JOB NAME         | _____           |
| LOCATION         | _____           |
| ENGINEER         | _____           |
| CONTRACTOR       | _____           |
| PO#              | _____ TAG _____ |



886-GP

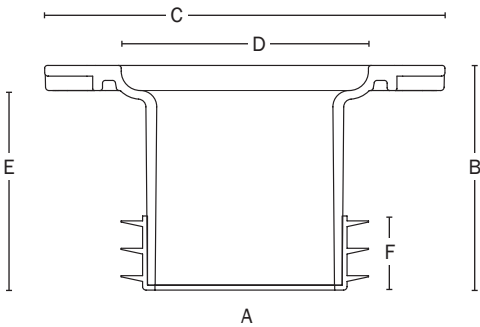

Made in USA

Create Item Number

## 886-A

e.g. **886-GP:** White ABS PushTite closet flange for inside 4" DWV pipe

### FLANGE BODY A

**GA** = Black ABS flange body

**GP** = White ABS flange body

**Gi** = Gray cast iron flange body