For Residential and Commercial Applications

Engineer/Architect:
Wholesaler:
Contractor:

B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose provides added durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection




Operating Specifications:

Temperature: 40°-160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

CONNECTOR MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	PVC coated yarn	
Barb	Brass	
Ferrule	Stainless steel	
Washer	Rubber	
Compression Nut	Brass, plated	
Elbow Adaptor	Brass, plated	
Fitting Adaptor	Brass, plated	





B1-12DW F	3/8" compression x 3/8" compression x 12" length	
B1-16DW F	3/8" compression x 3/8" compression x 16" length	
B1-20DW F	3/8" compression x 3/8" compression x 20" length	
B1-36DW F	3/8" compression x 3/8" compression x 36" length	
B1-48DW F	3/8" compression x 3/8" compression x 48" length	
B1-48DW6 F	3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow	
B1-48DW6 P	3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow, bagged	
B1U-48DW612 D	Universal Connector - 3/8" compression x 3/8" compression x 48" length	
	w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded	
B1-48DW12 F	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow	
B1-48DW12 P	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow, bagged	


This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression Inlet

Part Listing (con't):

 Listing (con t).	
B1-60DW F	3/8" compression x 3/8" compression x 60" length
B1-60DW6 F	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow
B1-60DW6 P	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow, bagged
B1-60DW12 F	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow
B1-60DW12 P	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow, bagged
B1-72DW F	3/8" compression x 3/8" compression x 72" length
B1-72DW6 F	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow
B1-72DW6 P	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow, bagged
B1-72DW12 F	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow
B1-72DW12 P	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bagged
B1-72DW612 B	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bulk
B1U-72DW612 D	Universal Connector - 3/8" compression x 3/8" compression x 72" length
	w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded
B1-84DW6 F	3/8" compression x 3/8" compression x 84" length w/ 3/8" MIP elbow
B1-120DW F	3/8" compression x 3/8" compression x 120" length

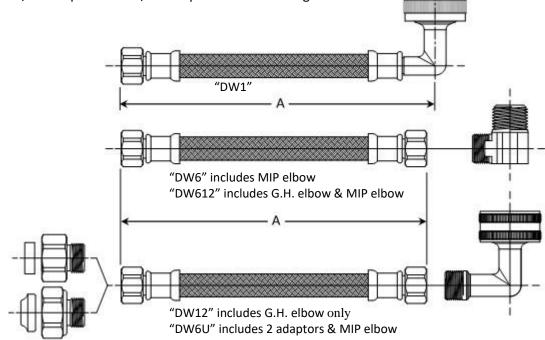

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-12DW	12.0 / 13.0	
B1-16DW	16.0 / 17.0	
B1-20DW	20.0 / 21.0	
B1-36DW	36.0 / 37.0	

DIM. A
48.0 / 49.0
48.0 / 49.0
48.0 / 49.0
60.0 / 61.0

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-60DW6	60.0 / 61.0	
B1-72DW	72.0 / 73.0	
B1-72DW6	72.0 / 73.0	
B1-120DW	120.0 / 121.0	

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61





This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

