

PEERLESS

P299685LF-A

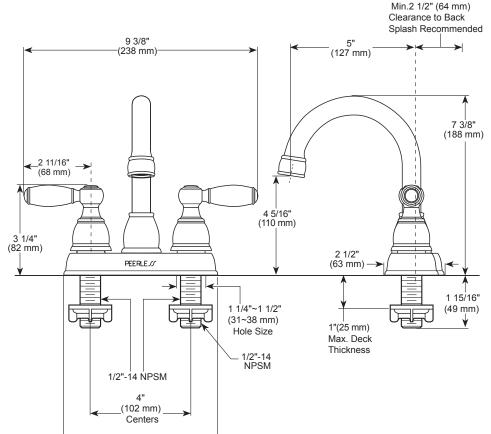



BATHROOM FAUCET:

- Two Handle Centerset
- 4-Inch 3-Hole Sink Applications

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three-hole mount
- · Hot and cold stems are interchangeable
- 1/4 turn handle stops
- 1/2"-14 NPSM threaded male inlet shanks
- Models have 50/50 push pop-up
- RP76691 thick deck mounting kit adds 1 1/4" (32 mm) to maximum deck thickness

2 1/8" ← (54 mm) → Dia. 2 1/4" (57 mm) Max Deck Thickness _ 3 1/4" (82 mm) 7 7/8" (200 mm)

(32 mm) Dia.

6 1/4" (159 mm)

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®

L ICC/ANSI A117.1

▲ Designate proper finish suffix

RP103419 A

50/50 Push Pop-up