


## Drivers, Handles & Accessories

### Robertson® Style Square Head Chuck Drivers

- Fully hardened, power-groove style driver. • Square tip will not cam out.
- #1 and #2 drivers available in 1-3/4 in. and 2-1/2 in. lengths. • Color coded for easy identification.

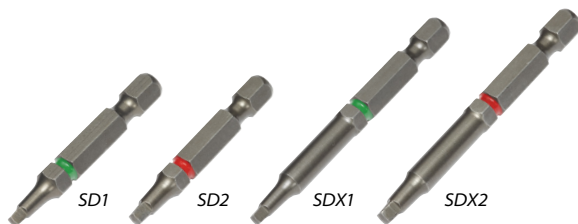

| Catalog Number | Description        | Point Size | Color | Shank Dia. in. | Overall Length in. (mm) |
|----------------|--------------------|------------|-------|----------------|-------------------------|
| SD1            | Square Head Driver | #1         | Green | 1/4            | 1-3/4 (45)              |
| SD2            | Square Head Driver | #2         | Red   | 1/4            | 1-3/4 (45)              |
| SDX1           | Square Head Driver | #1         | Green | 1/4            | 2-1/2 (63)              |
| SDX2           | Square Head Driver | #2         | Red   | 1/4            | 2-1/2 (63)              |

### Magnetic Hex Chuck Drivers



**Magnetic Hex Drivers**  
1/4 and 5/16 sizes also available in bulk tubs of 100.



**Magnetic Hex Drivers Long Style**  
1/4 and 5/16 sizes also available in bulk tubs of 50.



**Magnetic Hex Drivers Extra Long Style**  
1/4 and 5/16 sizes also available in bulk boxes of 50.

### Hollow Hex Chuck Drivers



### CONNEXT® Quick Change Handles

Clear, molded acetate GRIPS are shock-proof, shatter-proof and fluted to fit any hand. Including NEW Ratcheting Handle!



**CONNEXT 1**  
Standard Handle



**CONNEXT 2**  
Stubby Handle



**CONNEXT 3**  
Ratcheting Handle

### 1/4 in. Hex Shank Phillips Power Bits and Standard Bits



### Magnetic Bit Holder for 1/4 in. Hex Shank Insert Bits



**MBH14**

### Quick Change Hex Adapter

Accepts 1/4 in. hex power bits. Installs into chuck of a standard 3/8 in. power drill. Hex power bits can then be inserted or removed instantly without a key, by retracting the adapter sleeve. Tempered steel. Black finish.



**HAD1**

### Power Bit Extensions



Ball Bearing Lock  
Big 6 and 10 in. lengths

Accepts 1/4 in. hex power bits. Ball Bearing on holder provides a positive lock on 1/4 in. hex shank power bits. Tempered steel.

**BHE10**



## Specifications from previous page

### 1/4 in. Hex Shank Insert Bits Holder

| Catalog Number | Description | Hex Opening in. | Shank Dia. in. | Nose Dia. in. | O/A Lgth. in. |
|----------------|-------------|-----------------|----------------|---------------|---------------|
| <b>MBH14</b>   | Bit Holder  | 1/4             | 1/4            | 7/16          | 3             |

### Power Bit Extensions

| Catalog Number | Description         | Hex Opening in. | Shank Dia. in. | Nose Dia. in. | O/A Lgth. in. |
|----------------|---------------------|-----------------|----------------|---------------|---------------|
| <b>BHE6</b>    | Power Bit Extension | 1/4             | 1/4            | 9/16          | 6             |
| <b>BHE10</b>   | Power Bit Extension | 1/4             | 1/4            | 9/16          | 10            |

### Quick Change Hex Adapter

| Catalog Number | Description | Hex Opening in. | Shank Dia. in. | Bore Depth in. | Sleeve Dia. in. | O/A Length in. |
|----------------|-------------|-----------------|----------------|----------------|-----------------|----------------|
| <b>HAD1</b>    | Hex Adapter | 1/4             | 3/8            | 7/8            | 7/8             | 1-3/4          |

## 1/4 in. Hex Shank Power Bits



| Catalog Number | Description         | Point Size | Shank Dia. in. | O/A Lgth. in. |
|----------------|---------------------|------------|----------------|---------------|
| <b>MBLP2</b>   | Hex Shank Power Bit | 3          | 1/4            | 1-15/16       |
| <b>MBLP3</b>   | Hex Shank Power Bit | 2          | 1/4            | 1-15/16       |
| <b>MBLP4</b>   | Hex Shank Power Bit | 2          | 1/4            | 2-3/4         |
| <b>MBSP2</b>   | Hex Shank Short Bit | 2          | 1/4            | 1             |

## Size Recognition Color Key

- Red — 1/4 in. Hex Opening
- Yellow — 5/16 in. Hex Opening
- Blue — 3/8 in. Hex Opening
- Brown — 7/16 in. Hex Opening



## Hollow Nut Drivers

| Catalog Number | Description               | Color Coded | Hex Opening in. | Hollow Depth in. (mm) | Insert Dia. in. (mm) | Nose Dia. in. (mm) | Holder Dia. in. (mm) | Shaft Total Lgth. in. (mm) | O/A Lgth. in. (mm) | Shaft Replacement # |
|----------------|---------------------------|-------------|-----------------|-----------------------|----------------------|--------------------|----------------------|----------------------------|--------------------|---------------------|
| <b>CHD1</b>    | Connex™ Hollow Nut Driver | Red         | 1/4             | 1-1/2 (38)            | 1/4 (6)              | 7/16 (11)          | 11/16 (18)           | 3-3/8 (86)                 | 7-1/2 (19)         | <b>HD1</b>          |
| <b>CHD2</b>    | Connex™ Hollow Nut Driver | Red         | 1/4             | 3 (76)                | 1/4 (6)              | 7/16 (11)          | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>HD2</b>          |
| <b>CHD3</b>    | Connex™ Hollow Nut Driver | Yellow      | 5/16            | 1-1/2 (38)            | 1/4 (6)              | 1/2 (13)           | 11/16 (18)           | 3-3/8 (86)                 | 7-1/2 (19)         | <b>HD3</b>          |
| <b>CHD4</b>    | Connex™ Hollow Nut Driver | Yellow      | 5/16            | 3 (76)                | 1/4 (6)              | 1/2 (13)           | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>HD4</b>          |
| <b>CHD5</b>    | Connex™ Hollow Nut Driver | Blue        | 3/8             | 1-1/2 (38)            | 1/4 (6)              | 9/16 (14)          | 11/16 (18)           | 3-3/8 (86)                 | 7-1/2 (19)         | <b>HD5</b>          |
| <b>CHD6</b>    | Connex™ Hollow Nut Driver | Blue        | 3/8             | 3 (76)                | 1/4 (6)              | 9/16 (14)          | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>HD6</b>          |



## CONNEX™

### Magnetic Long Hand Drivers

| Catalog Number | Description              | Color Coded | Reaction | Hex Opening in. | Insert Dia. in. (mm) | Nose Dia. in. (mm) | Holder Dia. in. (mm) | Shaft Total Lgth. in. (mm) | O/A Lgth. in. (cm) | Shaft Replacement # |
|----------------|--------------------------|-------------|----------|-----------------|----------------------|--------------------|----------------------|----------------------------|--------------------|---------------------|
| <b>HHD1</b>    | Connex™ Long Hand Driver | Red         | Magnetic | 1/4             | 1/4 (6)              | 7/16 (11)          | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>MSHXL14</b>      |
| <b>HHD2</b>    | Connex™ Long Hand Driver | Yellow      | Magnetic | 5/16            | 1/4 (6)              | 1/2 (13)           | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>MSHXL516</b>     |
| <b>HHD3</b>    | Connex™ Long Hand Driver | Blue        | Magnetic | 3/8             | 1/4 (6)              | 9/16 (14)          | 11/16 (18)           | 6-7/8 (175)                | 10-1/2 (27)        | <b>MSHXL38</b>      |

## CONNEX™

### Magnetic Standard Length Hand Drivers

| Catalog Number | Description                        | Color Coded | Reaction | Hex Opening in. (mm) | Insert Dia. in. (mm) | Nose Dia. in. (mm) | Holder Dia. in. (mm) | Shaft Total Lgth. in. (mm) | O/A Lgth. in. (cm) | Shaft Replacement # |
|----------------|------------------------------------|-------------|----------|----------------------|----------------------|--------------------|----------------------|----------------------------|--------------------|---------------------|
| <b>HHD1S</b>   | Connex™ Standard Lgth. Hand Driver | Red         | Magnetic | 1/4                  | 1/4 (6)              | 7/16 (11)          | 11/16 (18)           | 3 (76)                     | 7-1/8 (18)         | <b>MSHL14</b>       |
| <b>HHD2S</b>   | Connex™ Standard Lgth. Hand Driver | Yellow      | Magnetic | 5/16                 | 1/4 (6)              | 1/2 (13)           | 11/16 (18)           | 3 (76)                     | 7-1/8 (18)         | <b>MSHL516</b>      |
| <b>HHD3S</b>   | Connex™ Standard Lgth. Hand Driver | Blue        | Magnetic | 3/8                  | 1/4 (6)              | 9/16 (14)          | 11/16 (18)           | 3 (76)                     | 7-1/8 (18)         | <b>MSHL38</b>       |

## CONNEX™

### Magnetic Stubby Hand Drivers

| Catalog Number | Description                | Color Coded | Reaction | Hex Opening in. (mm) | Insert Dia. in. (mm) | Nose Dia. in. (mm) | Holder Dia. in. (mm) | Shaft Total Lgth. in. (mm) | O/A Lgth. in. (cm) | Shaft Replacement # |
|----------------|----------------------------|-------------|----------|----------------------|----------------------|--------------------|----------------------|----------------------------|--------------------|---------------------|
| <b>HHD1T</b>   | Connex™ Stubby Hand Driver | Red         | Magnetic | 1/4                  | 1/4 (6)              | 7/16 (11)          | 11/16 (18)           | 2-1/4 (57)                 | 4-1/8 (10)         | <b>MSHT14</b>       |
| <b>HHD2T</b>   | Connex™ Stubby Hand Driver | Yellow      | Magnetic | 5/16                 | 1/4 (6)              | 1/2 (13)           | 11/16 (18)           | 2-1/4 (57)                 | 4-1/8 (10)         | <b>MSHT516</b>      |
| <b>HHD3T</b>   | Connex™ Stubby Hand Driver | Blue        | Magnetic | 3/8                  | 1/4 (6)              | 9/16 (14)          | 11/16 (18)           | 2-1/4 (57)                 | 4-1/8 (10)         | <b>MSHT38</b>       |