




PVC SUPER FASTTAP® SADDLES

PVC SUPER FASTTAP®

Plastic Saddle Punch Tee For Use On All PVC and PE Mains

The FASTTAP® PVC Saddle Tee is the most reliable and easy to use method of adding service connections to a plastic main. A live main can be tapped under full pressure. Simply bolt on the FASTTAP® saddle, connect the service line and then tap the main with the built-in coupon retaining punch. The punch will serve as an emergency shut-off valve and may be left in the closed position until service is needed.

No Corporation Stops! No Tapping Machines! One Tap Does It All!

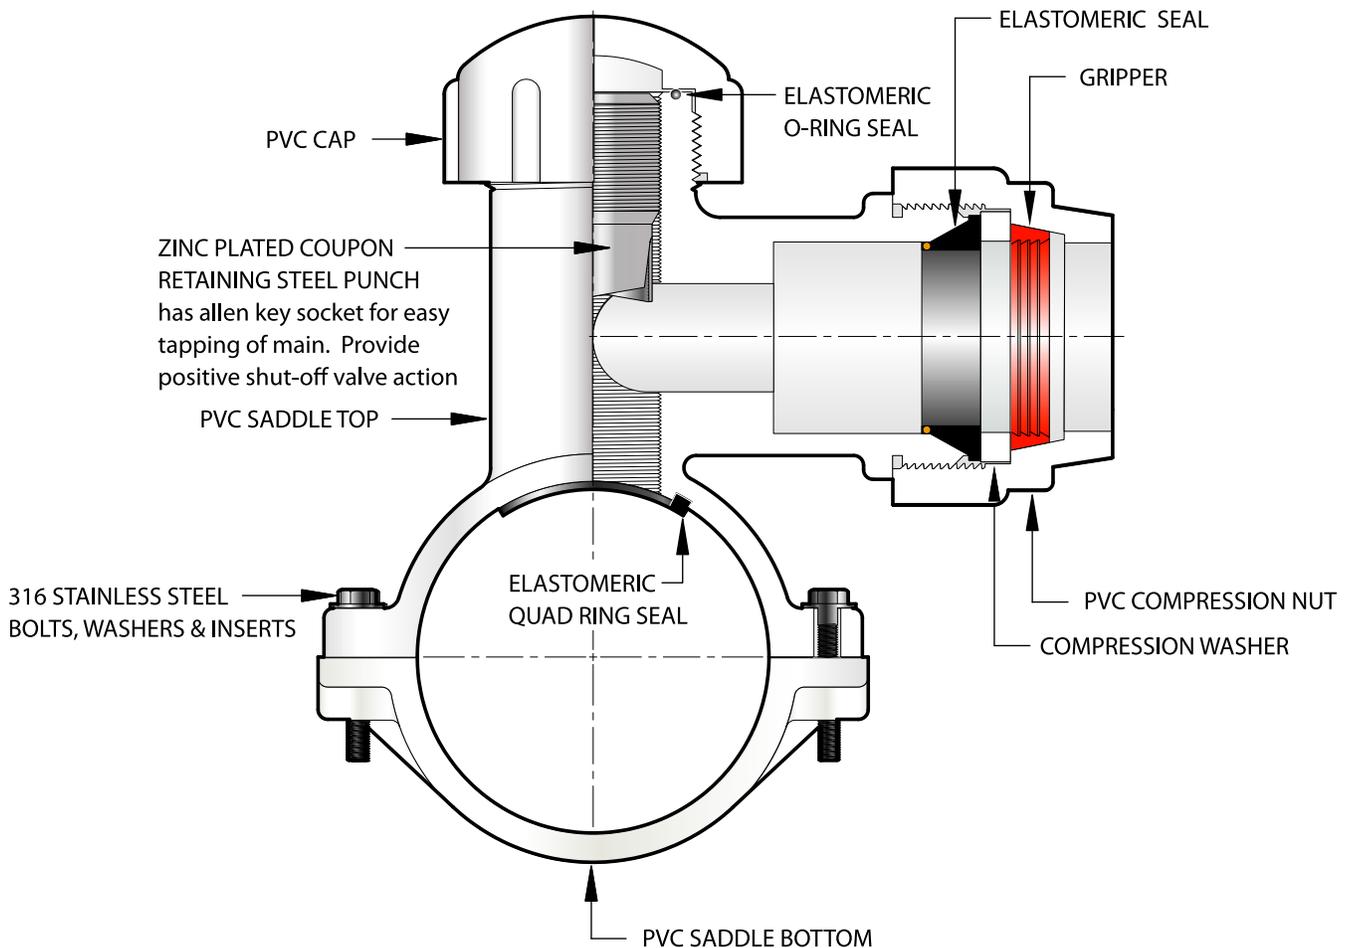

- Full wrap around saddle design eliminates stress points being applied to main.
- Tapping process uses simple combination tapping tool eliminating cumbersome tapping machines.
- Tapping cutter retains the coupon then functions as a cut-off valve eliminating corporation stops.
- Manufactured from noncorrosive materials.
 - PVC with PPI HDB Listing
 - 316 Stainless Steel Bolts
- Available to work with 2"-6" iron pipe size mains.
- Available with 1 1/4" and 2" PVC, PE or PB Compression outlets and 1 1/4", 1 1/2" & 2" PVC solvent-weld outlets.
- Application may be for wet or dry taps.
- See www.nsf.org for Continental's NSF Listing to Standard 61.
- Reduces installation time by 50%.

PVC SUPER FASTTAP® SADDLES



PVC SUPER FASTTAP SADDLES for IPS Mains

OUTLET	MAIN SIZE ^Ø	PART NUMBER 1 1/2" CR PUNCH
1 1/4" IPS SOCKET	2"	5161-17-0715-00
	3"	5161-19-0715-00
	4"	5161-21-0715-00
	6"	5161-24-0715-00
1 1/2" IPS SOCKET	2"	5161-17-0716-00
	3"	5161-19-0716-00
	4"	5161-21-0716-00
	6"	5161-24-0716-00
2" IPS SOCKET	2"	5161-17-0717-00
	3"	5161-19-0717-00
	4"	5161-21-0717-00
	6"	5161-24-0717-00
1 1/4" IPS COMPRESSION ^Δ	2"	5161-17-2515-00
	3"	5161-19-2515-00
	4"	5161-21-2515-00
	6"	5161-24-2515-00
2" IPS COMPRESSION ^Δ	2"	5161-17-2517-00
	3"	5161-19-2517-00
	4"	5161-21-2517-00
	6"	5161-24-2517-00



- For sizes not listed, contact Continental Industries.
- PVC Super Fasttaps are rated at 200 psi.
- Ø = Main sizes are for OD controlled pipe. Reference Tables 1, 2, 3, 4 & 5 on page 14.
- Δ = Compression fittings are for OD controlled tubing or pipe and are supplied without stiffeners. Reference Tables 1, 3 & 4 on page 14.
- Recommended accessories;
 - 33-4363-00 ~ 1/2" Square Drive Key, Bushing and Socket Adapter



33-4363-00
1/2" Square Drive Key, Bushing and
Socket Adapter

