

QuickFitting® Stainless Steel push-to-connect fittings deliver a patented design, superior sealing performance, and the highest corrosion resistance in both residential and commercial installations for joining of copper, PEX (with stiffener) and CPVC. Available in larger sizes (1-1/4" – 2").

### Features and Benefits

- 100% lead free, corrosion-resistant Stainless Steel
- Fast, simple push-to-connect installation
- No tools, crimping, glue or flames needed
- Safe for potable water applications
- Compatible with Copper, CPVC, & PEX
- U.S. Manufactured Grip Ring Technology
- Approved for behind the wall or direct burial (no wrap required)
- Easy removal with our patented Slip Clip™ Release Tool
- 7-Year Warranty

### Specification Data

#### Materials

- Body Construction: AISI 304 Stainless Steel
- O-Ring: EPDM
- Grip Ring: AISI 301 Stainless Steel
- Tube Stiffener: Glass-filled Nylon (1/2"-1") or Copper (1-1/4"-2")

#### Performance



- Maximum Working Pressure: 250 psi
- Maximum Temperature: 200° F
- Applications: Indoor or outdoor plumbing, heating repair, marine repair, RV & mobile home repair, irrigation

### Certifications and Listings

IAPMO listed as in compliance with the following standards:

- ASSE 1061-2015
- NSF/ANSI/CAN 61-2019, NSF/ANSI/CAN 372-2020
- IAPMO/ANSI Z1157-2014e1 (R2019)

Fitting Size	Insertion Depth
1/2"	1"
3/4"	1-3/16"
1"	1-3/16"
1-1/4"	1-7/8"
1-1/2"	2-1/8"
2"	2-3/16"

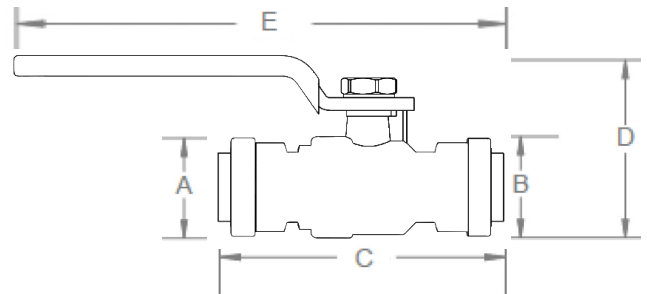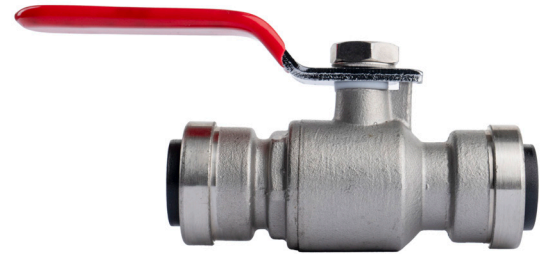

### Dimensional Data

Part No.	Size	A	B	C	D	E
SS912R	1/2"	1.06"	1.06"	3.11"	1.97"	5.32"
SS922R	3/4"	1.35"	1.35"	3.80"	2.27"	5.70"
SS932R	1"	1.75"	1.75"	4.21"	2.87"	6.46"
SS952R	1-1/4"	2.12"	2.12"	5.82"	3.76"	7.67"
SS962R	1-1/2"	2.57"	2.57"	6.87"	4.42"	8.37"
SS972R	2"	3.22"	3.22"	7.47"	5.23"	10.06"

Item # Submitted	
Job Name	
Date	
Engineer	
Contractor	
PO #	
Tag	