

# For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

## BF1-\*\*DL / BF3-\*\*DL Speedi Plumb® PLUS Braided Toilet Connector - Flare Inlet

**Use:** For use in potable water distribution systems in accessible locations only.

### Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **Long wing nuts** allow for quick connection and ensure dependable thread engagement



### Operating Specifications:

**Temperature:** 40° - 160° F, intermittent to 180° F

**Pressure:** 125 PSI maximum


**Tubing Diameter:** 0.300" ID (0.550" OD)

### CONNECTOR MATERIAL SPECIFICATIONS

<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	PVC coated yarn
<b>Barb</b>	Brass
<b>Ferrule</b>	Stainless steel
<b>Nut</b>	Brass, plated or polypropylene
<b>Washer</b>	Rubber
<b>Compression Nut</b>	Brass, plated


### Part Listing:

- |                          |             |   |
|--------------------------|-------------|---|
| <input type="checkbox"/> | BF1-12DL F  | 3/8" flare x 7/8" ballcock x 12" length             |
| <input type="checkbox"/> | BF1-16DL F  | 3/8" flare x 7/8" ballcock x 16" length             |
| <input type="checkbox"/> | BF1-20DL F  | 3/8" flare x 7/8" ballcock x 20" length             |
| <input type="checkbox"/> | BF3-12DL F  | 1/2" flare x 7/8" ballcock x 12" length             |
| <input type="checkbox"/> | BF3-12DLM F | 1/2" flare x 7/8" ballcock (metal nut) x 12" length |
| <input type="checkbox"/> | BF3-16DL F  | 1/2" flare x 7/8" ballcock x 16" length             |
| <input type="checkbox"/> | BF3-20DL F  | 1/2" flare x 7/8" ballcock x 20" length             |

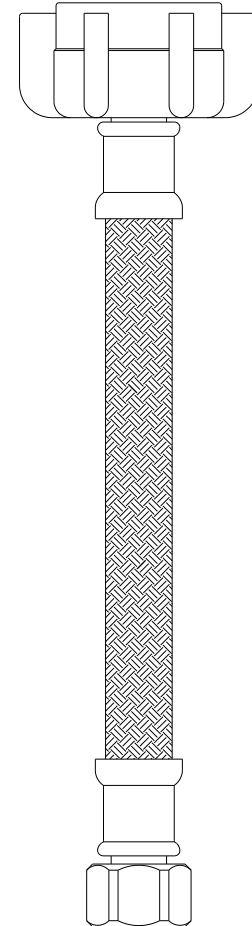

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

# BF1-\*\*-DL / BF3-\*\*-DL Speedi Plumb® PLUS Braided Toilet Connector - Flare Inlet

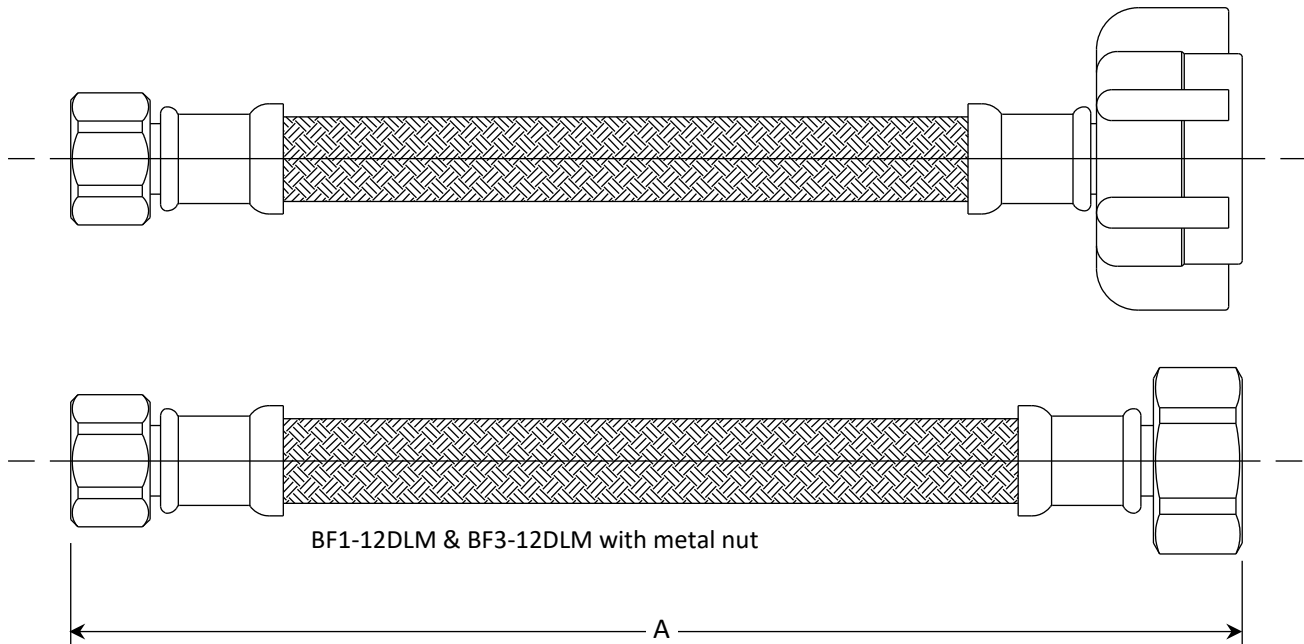

PART DIMENSIONS (Inches)	
Model	DIM. A
BF1-12DL	12.0 / 13.0
BF1-16DL	16.0 / 17.0
BF1-20DL	20.0 / 21.0

PART DIMENSIONS (Inches)	
Model	DIM. A
BF3-12DL	12.0 / 13.0
BF3-16DL	16.0 / 17.0
BF3-20DL	20.0 / 21.0

## Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

**BrassCraft®**