

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied petroleum gases, and LP gas-air mixtures.


Operating Specifications:

Temperature: -40° - 150° F

Pressure: 1/2 PSI maximum

FITTING MATERIAL SPECIFICATIONS	
Brass Body	Brass
Steel Body	Steel, plated

PART DIMENSIONS (Inches)			
Model	DIA. A	DIM. B	DIM. C
AU2-8	0.438	1.81	7/8
AU2-8-6	0.438	1.61	3/4
AU2-6-8	0.312	1.78	7/8
AU2-6	0.312	1.55	11/16

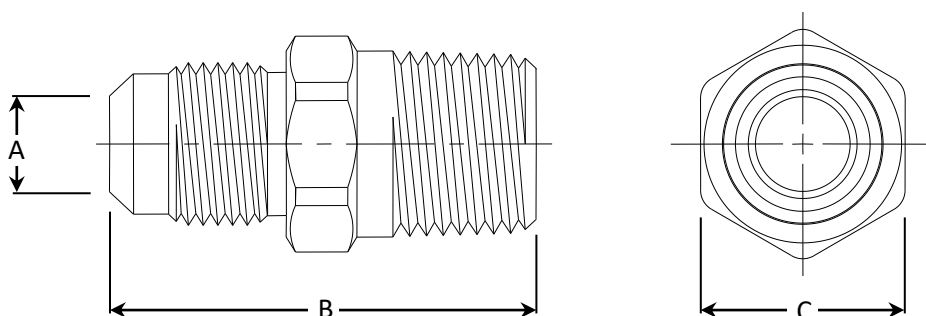

Part Listing:

- | | | |
|--------------------------|------------|--|
| ☐ | AU2-6 | 3/8" OD flare x 3/8" MIP (1/8" FIP tapped), brass |
| ☐ | AU2-6 B | 3/8" OD flare x 3/8" MIP (1/8" FIP tapped), brass, bulk packed |
| ☐ | AU2-6S | 3/8" OD flare x 3/8" MIP (1/8" FIP tapped), steel |
| ☐ | AU2-6-8 | 3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass |
| ☐ | AU2-6-8 BT | 3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass, generic bag |
| ☐ | AU2-6-8S | 3/8" OD flare x 1/2" MIP (3/8" FIP tapped), steel |
| ☐ | AU2-6-8S B | 3/8" OD flare x 1/2" MIP (3/8" FIP tapped), brass, bulk packed |
| ☐ | AU2-8-6 | 1/2" OD flare x 3/8" MIP, brass |
| ☐ | AU2-8-6S | 1/2" OD flare x 3/8" MIP, steel |
| ☐ | AU2-8-6S B | 1/2" OD flare x 3/8" MIP, steel, bulk |
| ☐ | AU2-8 | 1/2" OD flare x 1/2" MIP (3/8" FIP tapped), brass |

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®

AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

Part Listing (con't):

☐	AU2-8 B	1/2" OD flare x 1/2" MIP (3/8" FIP tapped), brass, bulk packed
☐	AU2-8S	1/2" OD flare x 1/2" MIP (3/8" FIP tapped), steel
☐	AU2-8-12S	1/2" OD flare x 3/4" MIP (1/2" FIP tapped), steel
☐	AU2-14-12	7/8" OD flare x 3/4" MIP (1/2" FIP tapped), brass
☐	AU2-14-16	7/8" OD flare x 1" MIP (3/4" FIP tapped), brass

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors
- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®