
**INDUSTRY STANDARDS**

- NEMA —Type 3R
- UL 870—Type 3R
- CUL—Type 3R (Equivalent to CSA)

**APPLICATION**

- Designed to protect wiring in outdoor installations against rain, sleet, or snow, or indoors against dripping water.

**CONSTRUCTION**

- Trough and cover are manufactured from 16 gauge **G90** galvanized steel.
- Available with or without paint—for no paint refer to suffix **-NP** in the catalog number.
- Cover is designed to fit under the drip shield top, and is held in place with plated steel screws.

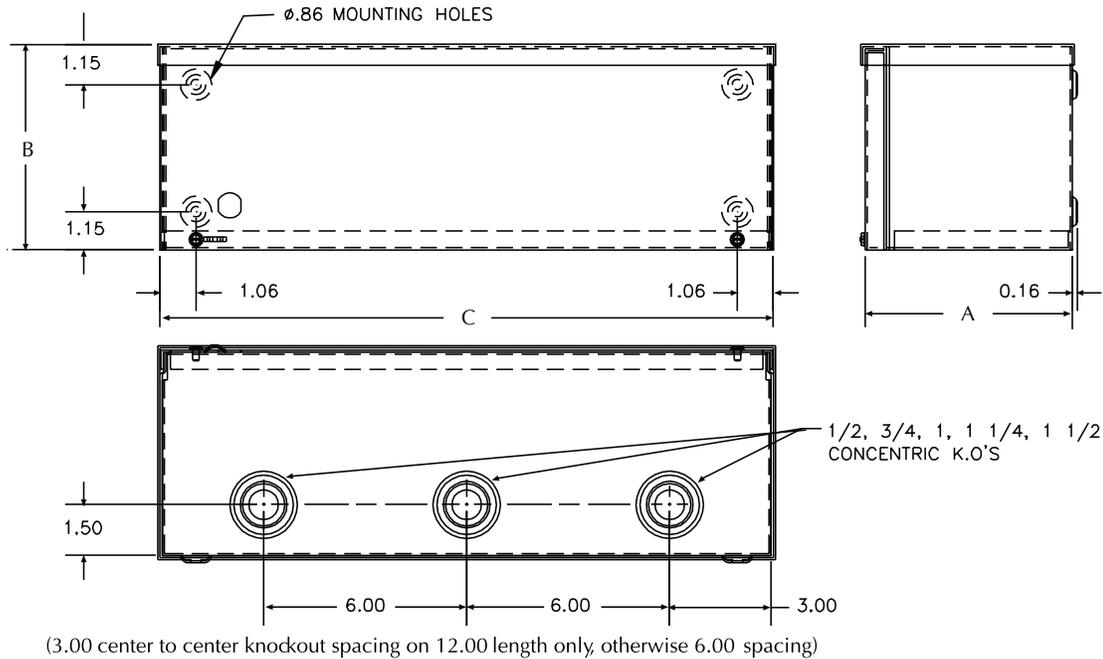
- Wireway is available with or without concentric knockouts on the bottom—for no knockouts refer to suffix **-NK** in the catalog number.
- Embossed mounting holes are provided on the backs of the units.

**FINISH**

- ANSI 61 gray polyester powder coating over phosphatized **G90** galvanized steel.

**ACCESSORIES**

- Touch-up paint – see Accessories pg. B34.
- Locks – see Accessories pg. B33.


**COMMERCIAL ENCLOSURES**
**GSC3R—SCREW COVER WIRING TROUGH—TYPE 3R**

| CATALOG NUMBER   | PRODUCT FAMILY | UPC NUMBER<br>7-84572- | WEIGHT (LBS) | CARTON QUANTITY | H X D X L  | NUMBER OF KOS |
|------------------|----------------|------------------------|--------------|-----------------|------------|---------------|
| 4412-GSC3R       | GS3R           | 10629                  | 4.5          | 4               | 4 x 4 x 12 | 3             |
| 4412-GSC3R-NK    | GS3R           | 10630                  | 4.5          | 4               | 4 x 4 x 12 | NONE          |
| 4412-GSC3R-NK-NP | GS3R           | 16177                  | 4.5          | 4               | 4 x 4 x 12 | NONE          |
| 4418-GSC3R       | GS3R           | 10637                  | 6.5          | 4               | 4 x 4 x 18 | 3             |
| 4418-GSC3R-NK    | GS3R           | 21813                  | 6.5          | 4               | 4 x 4 x 18 | NONE          |
| 4424-GSC3R       | GS3R           | 10642                  | 8.5          | 4               | 4 x 4 x 24 | 3             |
| 4424-GSC3R-NK    | GS3R           | 10643                  | 8.5          | 4               | 4 x 4 x 24 | NONE          |
| 4424-GSC3R-NK-NP | GS3R           | 16176                  | 8.5          | 4               | 4 x 4 x 24 | NONE          |
| 4436-GSC3R       | GS3R           | 10648                  | 12           | 4               | 4 x 4 x 36 | 5             |
| 4436-GSC3R-NK    | GS3R           | 10649                  | 12           | 4               | 4 x 4 x 36 | NONE          |
| 4436-GSC3R-NK-NP | GS3R           | 16175                  | 12           | 4               | 4 x 4 x 36 | NONE          |
| 4448-GSC3R       | GS3R           | 10660                  | 15.8         | 4               | 4 x 4 x 48 | 7             |
| 4448-GSC3R-NK    | GS3R           | 10661                  | 15.8         | 4               | 4 x 4 x 48 | NONE          |
| 4448-GSC3R-NK-NP | GS3R           | 16174                  | 15.8         | 4               | 4 x 4 x 48 | NONE          |
| 4460-GSC3R       | GS3R           | 10666                  | 19.5         | 4               | 4 x 4 x 60 | 9             |
| 4460-GSC3R-NK    | GS3R           | 10667                  | 19.5         | 4               | 4 x 4 x 60 | NONE          |
| 4460-GSC3R-NK-NP | GS3R           | 16173                  | 19.5         | 4               | 4 x 4 x 60 | NONE          |

*Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment in this catalog.*

NK=no knockout, NP=no paint

**B25**

