

# CAPS AND COUPLERS

## O-RING QUICK SEAL CAPS



Deep vacuum and A/C refrigeration;  
Finger-tight sealing for all male  
SAE connections

NFT5-4



### O-RING QUICK SEAL CAPS

| PART NO.   | QTY. | DESCRIPTION             |
|------------|------|-------------------------|
| NFT5-4     | 10   | 1/4" SAE cap            |
| NFT5-5     | 5    | 5/16" SAE cap           |
| NFT5-6     | 3    | 3/8" SAE cap            |
| NFT5-8     | 3    | 1/2" SAE cap            |
| NFT5-4-100 | 100  | 1/4" SAE cap            |
| NFT5-6-100 | 100  | 3/8" SAE cap            |
| P90010     | 10   | Replacement 1/4" o-ring |
| P90011     | 10   | Replacement 3/8" o-ring |

## QUICK SEAL GASKET CAPS



Deep vacuum and A/C refrigeration;  
finger-tight sealing for all male  
SAE connections

A31985



### QUICK SEAL GASKET CAPS

|            |     |                    |
|------------|-----|--------------------|
| A31985     | 10  | 1/4" SAE cap       |
| A31985-100 | 100 | 1/4" SAE cap       |
| P509       | 6   | Replacement gasket |
| P509-25    | 25  | Replacement gasket |

## O-RING SEAL LINE PIERCING



Our spring loaded needle automatically  
back-seats, forming a leak proof seal.  
A simple installation that is  
100% restriction-free. Both  
models fit 1/4", 5/16", 3/8",  
1/2", and 5/8" OD tubing.

LT-456



### O-RING SEAL LINE PIERCING

|        |                                 |
|--------|---------------------------------|
| LT-456 | 1/4" – 3/8" Line piercing valve |
| LT-810 | 1/2" – 5/8" Line piercing valve |

## E-Z TAPPER



The back-seating stem eliminates  
line restriction when servicing  
through access port or when  
using the valve for flow control.

EZ-40288



### E-Z TAPPER

|              |   |                           |
|--------------|---|---------------------------|
| EZ-40288     | 1 | E-Z tapper piercing valve |
| EZ-40288-126 | 5 | E-Z tapper gasket         |

## WRENCH STYLE SEAL CAP



For A/C refrigeration service;  
brass-to-brass positive seal  
and permanent installation

A31986



### WRENCH STYLE SEAL CAP

| PART NO. | QTY. | DESCRIPTION  |
|----------|------|--------------|
| A31986   | 5    | 1/4" SAE cap |

## BACK-SEATING CONTROL VALVE



Ideal for use on pre-charged line sets.  
Eliminates spraying of leak detection  
dye and refrigerant. Compact brass  
body for long service. Swivel coupler  
with double safety grooves.

A33000



### BACK-SEATING CONTROL VALVE

|        |    |                                      |
|--------|----|--------------------------------------|
| A33000 | 1  | 1/4" SAE x 1/4" o-ring quick coupler |
| P90009 | 10 | Replacement o-ring                   |


## EVACUATION RECOVERY TOOL



A31997 is a 1/4" SAE gasket seal  
cap with core remover feature.  
A31998 is a 1/4" plastic  
core remover.

A31997

A31998




### EVACUATION RECOVERY TOOL

|        |    |  |
|--------|----|--|
| A31997 | 10 | 1/4" SAE gasket seal caps with core removers |
| A31998 | 5  | 1/4" Plastic core removers                   |

## SPECIALTY CAPS AND 1/2" 16 ACME CAPS

A31992

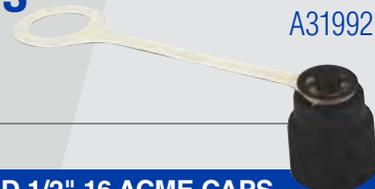

### SPECIALTY CAPS AND 1/2" 16 ACME CAPS

|            |     |                                 |
|------------|-----|---------------------------------|
| A31992     | 5   | 1/4" SAE cap                    |
| A31992-100 | 100 | 1/4" SAE cap                    |
| 13493      | 2   | Plastic cap with retainer strap |
| 13494      | 1   | Plastic cap                     |