



## SPECIFICATION SHEETS

NAME:

**FM120-LED**

TYPE:

DESIGNER SERIES FLUSH MOUNT

DATE:

NOTES:

## SPECIFICATIONS


WIRING:	Installs easily in traditional junction boxes ( 3" or 4" ).
OPTICS:	LED technology delivers 1500 lumens (12" version ) and 2000 lumens (16" version).
ELECTRICAL:	<p>Integrated LEDs are direct-AC with no external driver. For usage in interior ceiling or wall installations in residential or commercial applications.</p> <p>Ambient operating temperature: -20°C (-4°F) to +50°C (+122°F).</p> <p>Certifications: ETL and Energy Star listed to U.S. and Canadian safety standards, as well as DAMP LOCATIONS rated.</p>
LENS:	White decorative acrylic frosted lens provides an even light distribution.

COLOR TEMPERATURE:	3K - 4K
OPERATING TEMPERATURE:	-20°C + 50°C
CRI:	80+
LUMEN OUTPUT:	1500LM
DIMMABLE:	Yes
WATTS:	20 W
LED LIFE:	50,000 hours
WARRANTY:	5 years
VOLTAGE:	120V
DIAMETER:	11.75" (298.5mm)
HEIGHT:	3.375" (85.7mm)
INTEGRATED MOTION SENSOR:	No

## APPLICATIONS

The Azure series of LED flush mount fixtures by NDR Lighting offers an affordable and stylish design that will complement a varied assortment of lighting applications. The acrylic diffuser may be easily removed for installation and cleaning. Ideal for interior ceiling or wall installations in residential or commercial applications.

## DIMENSIONS

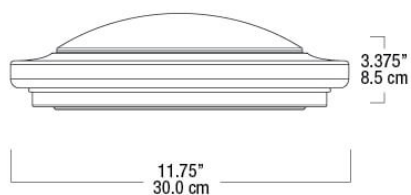

## RATINGS



## ORDERING GUIDE

### AZURE FM120 SERIES

Series	Color Temperature	Finish
FM120-20W	3K 3000K/80CRI/20W	WH White
	4K 4000K/80CRI/20W	

**Notes:** Configure product using **BOLD** options: Ex: **FM120-20W-3K-WH**