
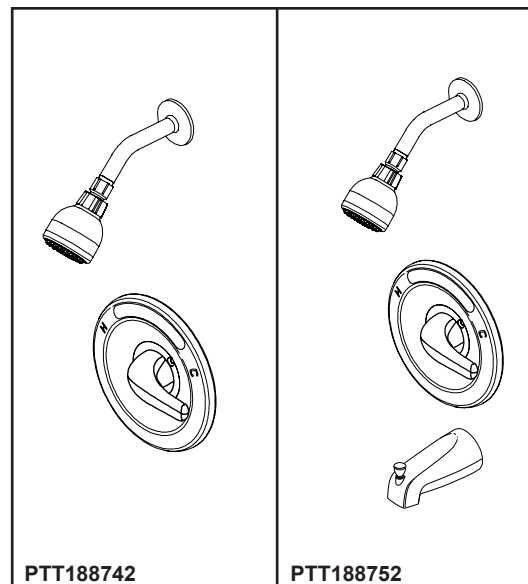
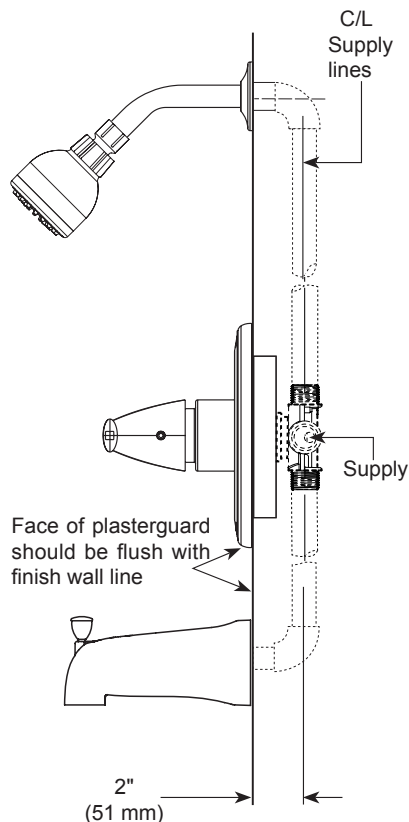


# PEERLESS®

PTT188742  
PTT188752

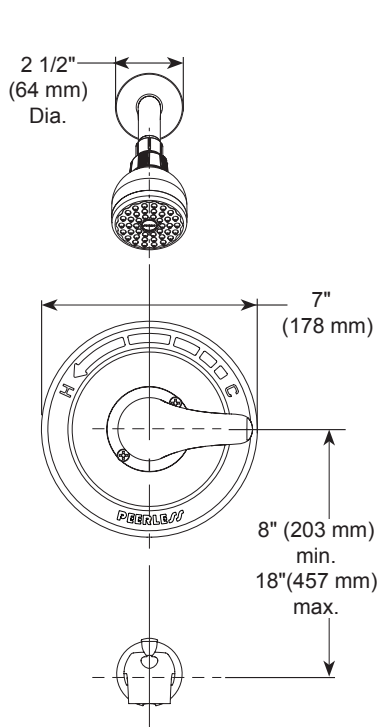

## TUB AND SHOWER FAUCET TRIM

- Shower Only (PTT188742 Series)
- Tub/Shower (PTT188752 Series)


### STANDARD SPECIFICATIONS:

- Shower head max flow rate 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa.
- For use with PTR188700 Series rough valve body; not included.
- Back-to-back installation capability.
- Red/blue markings on escutcheon for hot/cold identification.
- Temperature only controlled with handle rotating a maximum of 120° from full cold to the full hot.
- Single-setting shower head with full body spray.
- Slip-on tub spout.


### WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.peerlessfaucet.com](http://www.peerlessfaucet.com) for the complete details of our limited warranty.

#### RP75572▲ 1.5 GPM



#### RP71609▲

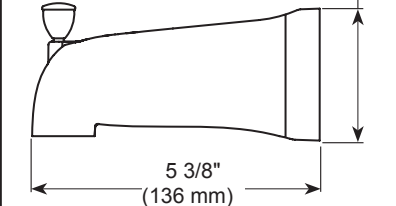

\*1/2"-14 threaded tub spout  
with slip-on adapter included



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

ICC/ANSI A117.1- Valve control only