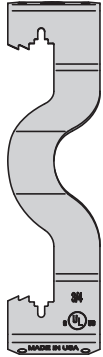**PHOENIX** ®
SUPPORT SYSTEMS

Available Finishes / Materials:
VG -- Phoenix Vanguard
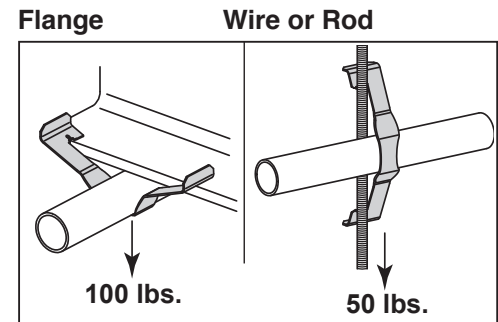Standard Finish: VG

c UL us LISTED

- Supports conduit and pipe to a rod, wire or flange.
- No installation tools required.
- Box Qty 100 for all sizes.
- **Material:** Spring Steel
- **Finish:** Vanguard

MC/AC Cable Size	#12, #10, #9 & #8 Wire
14 - 2 (.433-.475 O.D.)	
14 - 3 (.453-.500 O.D.)	WX
12 - 2 (.467-.475 O.D.)	
12 - 3 (.489-.535 O.D.)	

WX For Position Only

Flange   **Wire or Rod**

100 lbs.   **50 lbs.**

W clips shown.

Conduit Size	#12 & #10 Wire	#9 & #8 Wire	3/16" & 1/4" Rod	1/8" Thru 1/4" Flange	5/16" Thru 3/8" Flange	7/16" Thru 1/2" Flange
1/2" EMT	W8	W8	W8	W8	W12	W12
1/2" RIGID	W8	W12	W12	W12	W12	W16
3/4" EMT	W12	W12	W12	W12	W16	W16
3/4" RIGID	W12	W12	W16	W16	W16	W20
1" EMT	–	W16	W16	–	W20	W20
1" RIGID	–	–	–	W20	W20	W20
1-1/4" EMT	–	W20	W20	W20	–	–

Material Specifications and Finishes

Spring Steel:
Cold Roll, ASTM A684 Grade 1055 Spring Steel

VG – Phoenix Vanguard

Phoenix Vanguard coating is a multi-step process that meets the 1000 hour salt spray test per ASTM B117 and DIN 50021. **Vanguard coating is WEEE, ELV and RoHS compliant**. VG Finish is approved for wet and dry applications. It is a chrome free three step coating system that combines an inorganic zinc-rich basecoat with an aluminum-rich organic topcoat.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submited By:	Address:	
Comment		