

### SPECIFICATIONS

Capacity <sup>(1)</sup>	70 ppd	
Energy Factor <sup>(1)</sup>	1.91 L/kW-h	
Airflow @ varying E.S.P. (external static pressure - dry coil)		
	0.0" w.c.	160 CFM
	0.2" w.c.	120 CFM
	0.4" w.c.	75 CFM
Voltage, phase, frequency	120VAC, 1, 60 Hz	
Current draw <sup>(1)</sup>	6.3 Amps	
Noise	47 dBA ducted	51 dBA unducted
Dimensions: (cabinet only) <sup>(2)</sup>	Width	12.5"
	Height	14.5"
	Length	25.0"
Weight	67 lbs.	
Inlet air operating conditions during		
-Dehumidification:	50°F – 104°F, 40°F dew point min.	
-Ventilation:	40°F – 140°F, 0% – 99%RH (non-condensing)	

<sup>(1)</sup> Rated capacity and energy factor test done and current draw measured in accordance with AHAM DH-1 2008 at 80°F/60%RH inlet air at 0.0 ESP. <sup>(2)</sup> Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.

### FEATURES

Controls <sup>(3)</sup>	Built-in digital control with top or front mounting options
Cabinet insulation	1/2" EPS
Air discharge orientation	Top or end
Inlet/Outlet duct collars	10" dia.
Backdraft damper at outlet	Included
Filter	1/2" washable, MERV 8
Refrigerant	R410A
Coil corrosion resistance	E-Coated coil
8' Power cord	Plug type
Hardwire option	Yes, field configurable
Discharge air temperature rise	10°F – 30°F
Drain connection <sup>(4)</sup>	3/4" MNPT Threaded
Warranty	5 Years

<sup>(3)</sup> Built-in automatic control capable to be set up for dehumidification and ventilation or zoning.

<sup>(4)</sup> Adapters for threaded connection or plastic hose included.



### PRINCIPLE OF OPERATION

The Aprilaire Model 1830 Dehumidifier is designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit.


Dehumidification occurs until the set point is reached. Periodic air sampling determines when a need for operation exists.

### APPLICATION

The Aprilaire Model 1830 is perfect for a wide range of applications including whole-home dehumidification, control of moisture in basements and crawlspaces and precise management of humidity in controlled environment agriculture.

### VENTILATION

The Model 1830 has the ability to bring in fresh air. Fresh air dilutes polluted stale air and reduces humidity in the winter. The fresh air is brought in through a 6" round duct and 6" round normally closed damper. The dehumidifier has built in controls to adjust the amount of fresh air that is brought in.

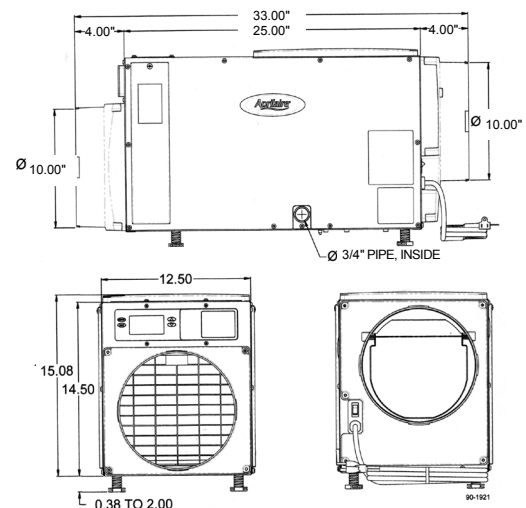


# Installation Options For the Aprilaire 1830 Dehumidifiers

Shown in horizontal applications, can be installed in vertical applications as well.

## APPLICATIONS

### Main Return to Main Return - RECOMMENDED

- This application can be used when a supply duct is not available
- Air is pulled from the return duct, dehumidified, and returned to the return duct
- Assures that the dehumidified air is mixed with rest of the air in the duct before it re-enters the house
- This application is for whole-home dehumidification.

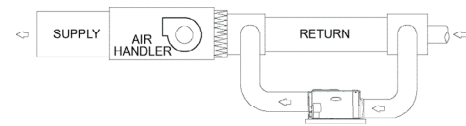


### Dedicated Return to Main Supply or Dedicated Return to A/C Return

- This application can be used when a return or supply duct is not available
- Air is pulled through a dedicated return grille, dehumidified, and returned to the supply plenum or return
- This application is for whole-home dehumidification.



### Inlet and Outlet ducted to dedicated grilles

- For homes without duct work
- Dries a specific area that has a moisture issue (basements, crawlspaces, sealed attics, etc.)
- Dehumidifier can be located in a closet, mechanical room or unfinished area and ducted into a finished room




### Main Return to Main Supply

- Air is pulled from the return duct, dehumidified, and returned to the supply plenum
- This application is for whole-home dehumidification.



### Freestanding

- Air is pulled into the dehumidifier directly from the space, dehumidified, and returned back to the space
- Dries a specific area that has a moisture issue (basements, crawlspaces, sealed attics, etc.)
- It can be used for whole-home dehumidification.



## Optional Wall-Mount Controls



### Model 8620/8620W with IAQ Control

- Universal 2H/2C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity or Ventilation
- Wi-Fi touch screen (8620W)



### Model 76 Wall Mount Dehumidifier Control

- On/Off buttons
- Wall mounted living space control
- Displays RH and controls to an RH value
- Remote control for crawlspace applications and sealed attics



### Model 8910/8910W with IAQ Control

- Universal 3H/3C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity and Ventilation
- 2 Part - 3-Wire design
- Wi-Fi touch screen (8910W)



### Model 8920W with IAQ Control

- Universal 3H/3C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity and Ventilation
- 2 Part - 3-Wire design
- Full color Wi-Fi touch screen



### MODEL 76 SPECIFICATIONS

Electrical	External	Remote
Input voltage and current	Voltage: 24VAC +/-20% Current: 25mA (nominal), 50mA (max.) at 24VAC	Voltage: 35VDC (supplied by dehumidifier control board)
Output	Dry contact, normally open	Communication (RS485)
Control	External	Remote
Control range	40% 80% RH	1 (less dry) - 7 (more dry) 65°F - 40°F dew point
Accuracy	+/-5% RH	See dehumidifier specifications
Differential	3% RH	
Low limit	40°F dew point	50°F dry bulb, 40°F dew point min.
High limit	99°F dry bulb	105°F dry bulb

AprilairePartners.com

Form No. 887 • 273064 6.17

©2017 Aprilaire - Division of Research Products Corporation

APRILAIRE RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

P.O. Box 1467

Madison, WI 53701-1467

800.334.6011 F: 608.257.4357

**Aprilaire**®

Trusted Solutions for a Healthy Home™