


Available Finishes / Materials:


PG -- Pre-Galvanized zinc

Standard Finish: PG

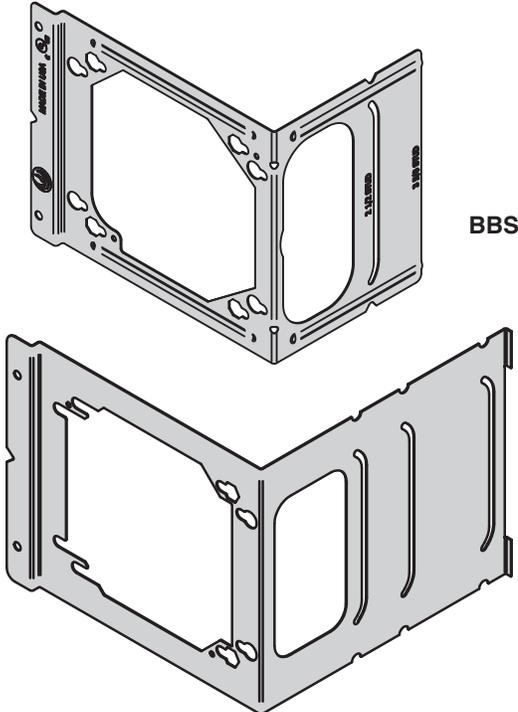

BBS

BBS6

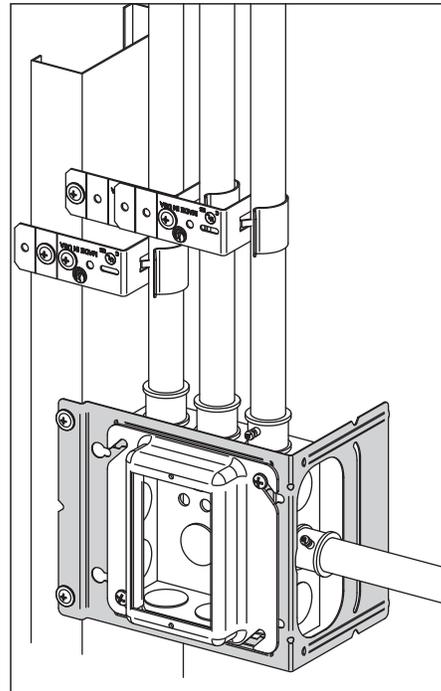

- Used to attach 4" and 4-11/16" outlet boxes to wood or metal studs.
- Large cutouts provided for conduit and fittings.
- Integral farside support prevents outlet box movement.
- Use with STS8 screws
- **Material:** Steel
- **Finish:** Pregalvanized

Catalog No.	Outlet Boxes	Box Depths	Stud Depths	Box Qty
BBS	4" Square, 4-11/16" Square & Low Voltage Plaster Rings	1-1/4", 1-1/2", & 2-1/8" Deep	2-1/2", 3-5/8"	100
BBS4 *			4"	100
BBS6 *			5-1/2", 6"	100

* Not a UL Listed Product

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

PG – ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Note: Specifications subject to change without notice.

Project:	Date:	Phone:
Submitted By:	Address:	
Comment		